

USING THE DIGITZS API

API Basics



Using the Digitzs API

This document describes how to download, configure, and use Postman to run the Digitzs API.

- 1 Go to <https://www.getpostman.com/>.
- 2 Download and install **Postman**.
- 3 Launch **Postman**.
- 4 Click the **Import** button to display the Import dialog.

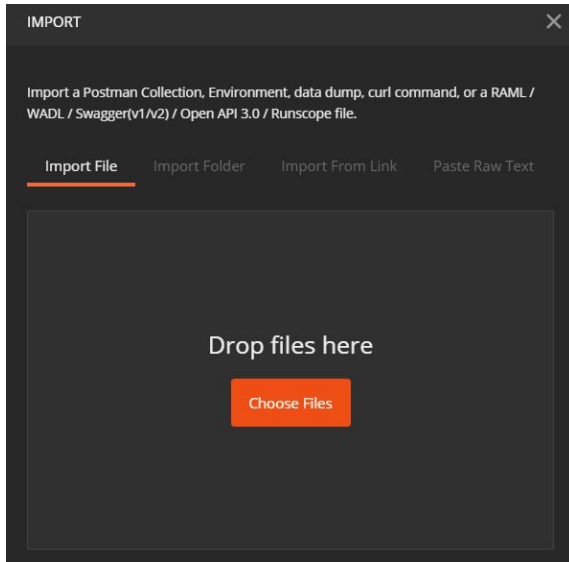


Figure 1 – Import Dialog

- 5 Click the **Choose Files** button to display the Open dialog.

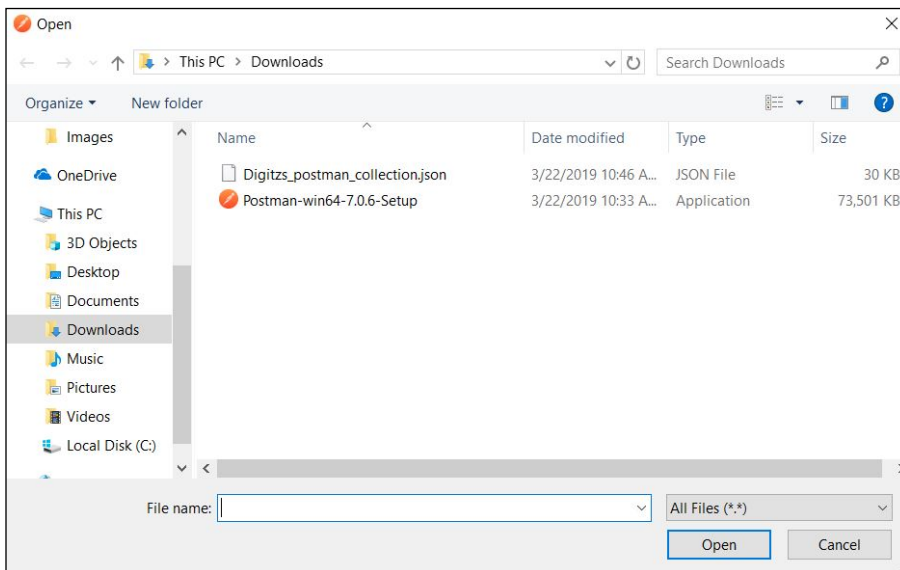


Figure 2 – Open Dialog

- 6 Select the **Digitzs_postman_collection.json** file.

- 7 Click the **Open** button to import the file into Postman.
- 8 Click the **Manage Environments** button to display the Manage Environments dialog.

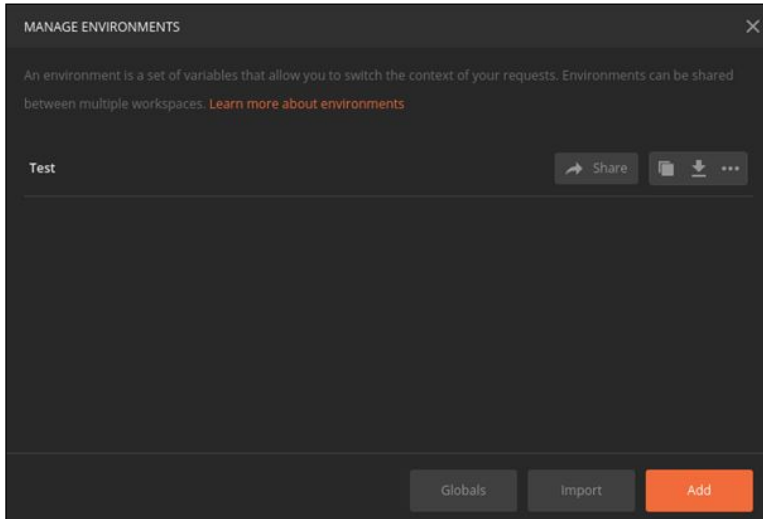


Figure 3 – Manage Environments Dialog

- 9 Click the **Add** button to display the Add Environment area.

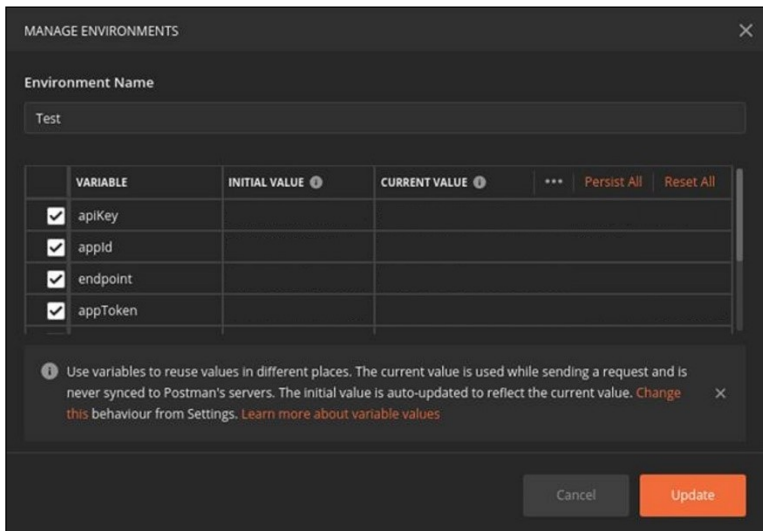


Figure 4 – Environment Variable Values

- 10 Enter the **apiKey**, **appId**, **endpoint**, and **appToken** environment variables provided by Digitzs during onboarding.
- 11 Click the **Update** button.
- 12 Run **POST Auth/Key** to get an appKey. Add it the Environment Variables.
- 13 Run **Auth/Token** to get an appToken that is valid for one hour. Add it to the Environment Variables.
- 14 Run **POST Test API-Card Payments** to get an "id". Add it to the Environment Variables as cardpaymentId.
- 15 Run **POST Test API-Card Payment Refund**. You should receive a Response as confirmation that the Environment Variables are configured accurately.

Note: Contact Digitzs at techsupport@digitzs.com or 855.563.4489 if you have any questions about our API.